


# 2 PIECE SYSTEM INSTALLATION


NOTE: For best results, install the units in lift to coincide with the wall construction. Piling should be free of debris that may interfere with the jacket installation and performance.




FRICITION REDUCTION PILE SLEEVE

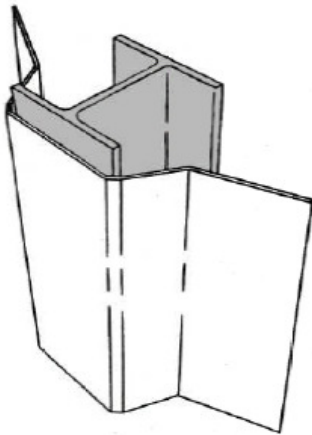


1) Center jacket on flange of pile.

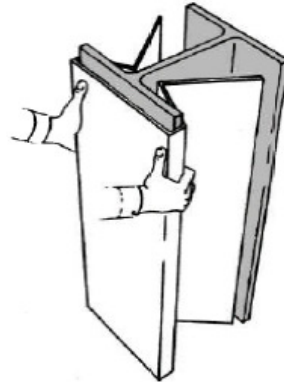


2) Square up the edges of the jacket scored to accommodate each end of the flange (full length of the jacket).

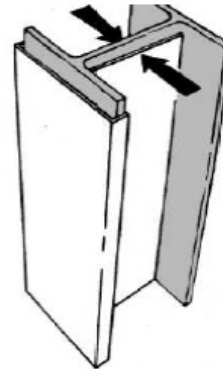


3) Push the web sections in to conform with the inside of the pile.

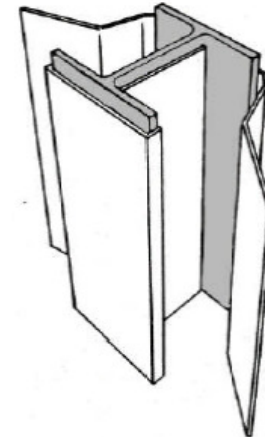


4) From the opposite side of the pile, repeat step one (1).

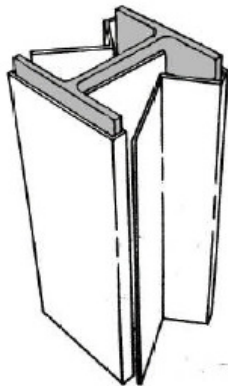

5) Repeat step two (2).

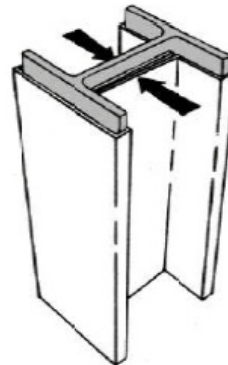

6) Repeat step three (3), overlapping the web sections of the jacket. Flaps will lock into position completing the installation.

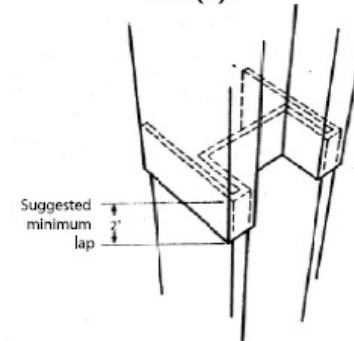

7) As each section is installed, lap as shown in Fig. no. 7 until desired length of pile is covered.

**Foundation Technologies, Inc.**

PO Box 491718  
Lawrenceville, GA 30049 1.800.773.2368